




tolerances according to ISO 2548 class C ann. B

Type **AP6L**

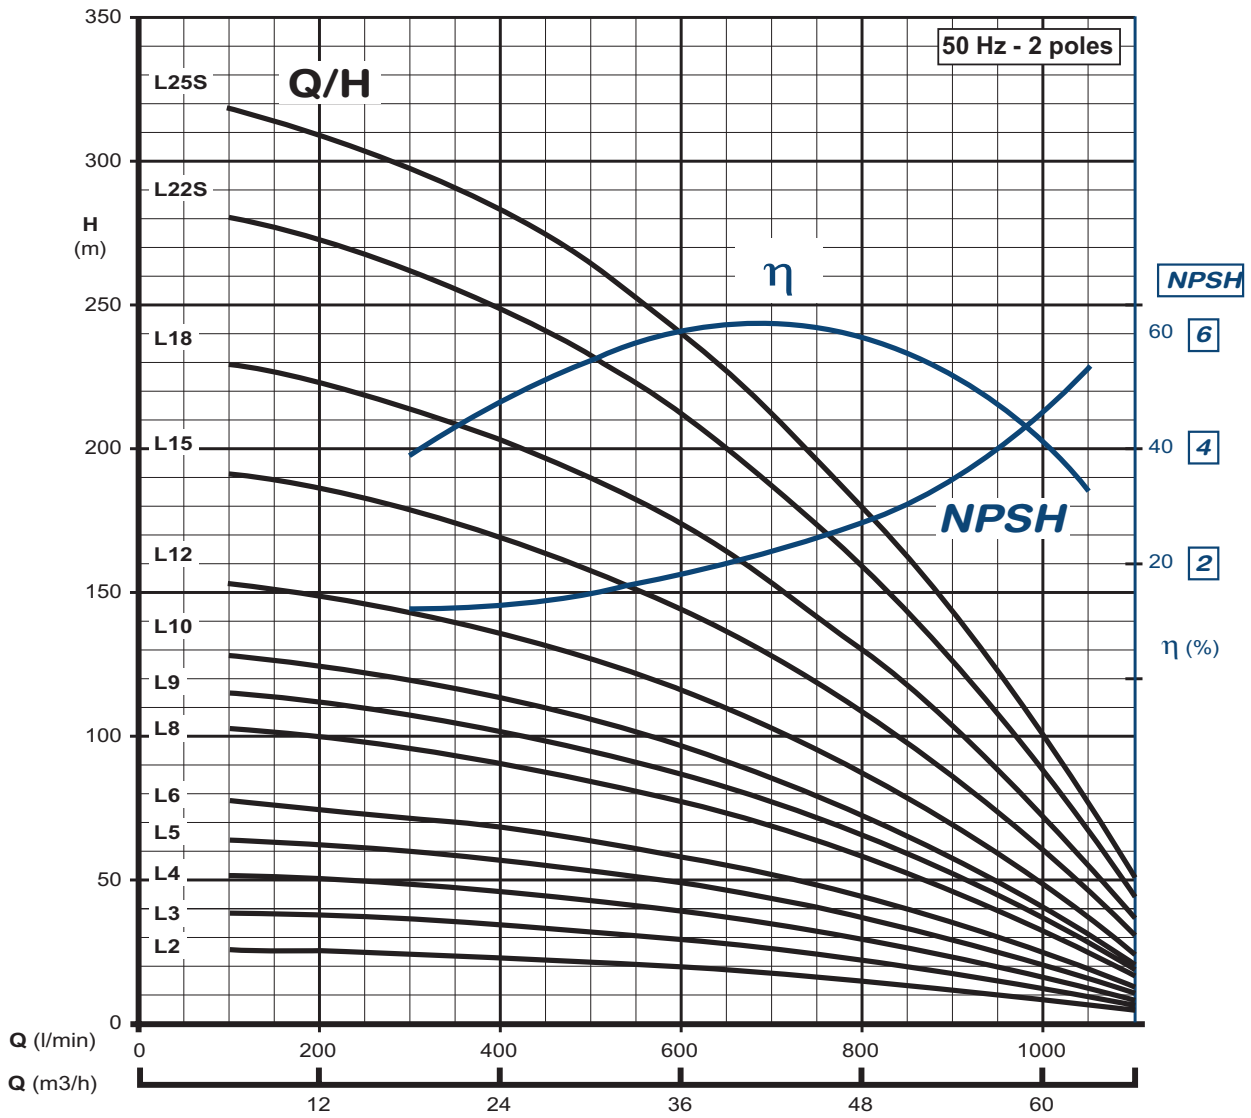

DIMENSIONS, WEIGHTS AND ELECTRICAL DATA

3Ph - 380-400-415V

TYPE	HP	Lenght (mm)			Weight (Kg)			400V Amp
		P.L.	M.L.	T.L.	PUMP	MOTOR	TOTAL	
AP6L2	5 *	408	545	953	6,9	20,8	27,7	9,1
AP6L3	7,5 *	468	697	1165	7,8	27,3	35,1	13,7
AP6L4	10	528	646	1174	8,7	44	52,7	16
AP6L5	12,5	588	679	1267	9,6	46,7	56,3	20,7
AP6L6	15	648	711	1359	10,4	49	59,4	23,3
AP6L8	17,5	768	776	1544	12,2	56,5	68,7	30
AP6L9	20	828	776	1604	13,1	56,5	69,6	31,3
AP6L10	25	888	842	1730	14	62	76	38,5
AP6L12	30	1008	907	1915	15,8	68,8	84,6	45,3
AP6L15	35	1188	1037	2225	18,5	85	103,5	55
AP6L18	40	1420	1037	2457	22,3	85	107,3	61,8
AP6L22S	50	1660	1405	3065	25,9	115	140,9	73
AP6L25S	60	1840	1558	3398	28,6	130	158,6	89,5

* Motor 4"

