

FLOOR STANDING BOILERS RS. MK. II

Distribuitor:
CALOR SRL
Str. Progresului nr. 30-40, sector 5,
Bucuresti
tel: 021.411.44.44, fax: 021.411.36.14
www.calorserv.ro - www.calor.ro





RS. MK. II

RMG Mk.II and **RS Mk.II** gas boilers are cast-iron made and are developed and manufactured in order to meet the demands of heating installations of middle and high output, thanks to the possible connection of several generators. The **RMG Mk.II** line of boilers has a range of 70 to 108 kW of output, while the **RS Mk.II**

units are available in a range between 129 and 279 kW. These units can be equipped with different feeding gas types and comply to the EEC Gas Directive 90/396, EEC Electromagnetic Compatibility Directive 89/336, EEG Low Tension Directive 73/23 and the EEC Performance Directive 92/42.

Modular expansion

In order to better distribute the thermal charges on large surfaces such as a house and/or a commercial or industrial estate, it is possible to make modular configurations with several **RMG/RS Mk.II** units.

Up to two/three boilers in sequence complete with pumps/zone valves can be managed, as well as the preparation of an external D.H.W. tank.



A modular installation of two RS Mk.II units

The simplicity of the controls

The control panel is simple and intuitive.

The initial set up allows for the fitting of a climatic thermoregulator (**RVA 43**) that, in connection with

an external sensor, will improve the performances and reduce the fuel seasonal consumption.



List of functions / devices

- | | |
|-----|---------------------|
| ▶ 1 | Main switch |
| ▶ 2 | Boiler thermostat |
| ▶ 3 | Thermometer |
| ▶ 4 | Smoke safety device |
| ▶ 5 | Safety thermostat |
| ▶ 6 | Lock-out button |

Safety and versatility

The two-step combustion system of **RMG Mk.II** and **RS Mk.II** leads to a higher performance and reduces the thermal inertia. The **RS Mk.II** units are equipped with an additional gas valve. The small dimensions of the **RMG Mk.II**, together with the possible reversibility of the hydraulic and gas connections facilitate the installation, even when the room available is a key factor.




Modular power

By means of the **RVA43** (optional) climatic regulator, the performance of the product reach its best. The system guarantees a high seasonal efficiency, a reasonably low fuel consumption thanks to the adjustable flow temperature, high comfort and control of the required room temperature.

The **RVA 43** climatic regulator adopts the principle of a climatic thermoregulation connected to an external sensor. It is able to:

- ▶ Manage the system made of up to three appliances;
- ▶ Manage the continuous modulation of the system's power;
- ▶ Manage the sequenced turning on and off of the various units;
- ▶ Adapt itself to the heating requirements (by means of the external sensor);
- ▶ Adapt the system according to the external temperature;
- ▶ Automatically switch between summer / winter modes if temperatures rise above the set values;
- ▶ Activate and deactivate the domestic water



system using a button on the regulator (if the system is connected to an external boiler);

- ▶ Manage the supply of the domestic water (if the system is connected to an external boiler) on a weekly basis;
- ▶ Priority activation of the production of domestic hot water (if the system is connected to an external boiler);
- ▶ Guarantee the diagnostic of any possible failure.



List of functions / devices

- | | |
|-----|--|
| ▶ 1 | Setting of the room temperature |
| ▶ 2 | Setting to the selected parameter |
| ▶ 3 | Parameter selection |
| ▶ 4 | Display of readings, settings and operating status |
| ▶ 5 | Operating rate buttons |
| ▶ 6 | LED function key for manual operation |
| ▶ 7 | PC connection for diagnosis and repair |

A cast-iron soul

Cast iron is an alloy whose properties remain unaltered throughout time and means reliability, long life and ease of maintenance.

The particular shape of the cast-iron heat exchanger leads to a perfectly balanced


combustion with very low gas exhaust emissions.

These are the most remarkable results that have been achieved by Sime through more than thirty years of experience.

Technical data

RS Mk.II		129 Mk.II	151 Mk.II	172 Mk.II	194 Mk.II	215 Mk.II	237 Mk.II	258 Mk.II	279 Mk.II
Heat output	kW	129,0	150,6	172,2	193,7	215,2	236,5	257,8	279,1
	kcal/h	110.900	129.500	148.100	166.600	185.000	203.400	221.700	240.000
Heat input	kW	145,9	170,0	194,2	218,2	242,1	266,0	290,0	313,6
	kcal/h	125.450	146.200	167.000	187.650	208.200	228.750	249.400	269.700
Efficiency at max. output	%	88,4	88,6	88,7	88,8	88,9	88,9	88,9	89,0
Efficiency at 30% of the output	%	86,7	86,9	87,1	87,3	87,5	87,6	87,7	87,8
Cast iron sections	no.	7	8	9	10	11	12	13	14
Absorbed electrical power	W	80	80	80	80	80	80	80	80
Maximum water head	bar	5	5	5	5	5	5	5	5
Weight	kg	542	612	682	757	829	904	974	1044

Overall dimensions - Hydraulic connections

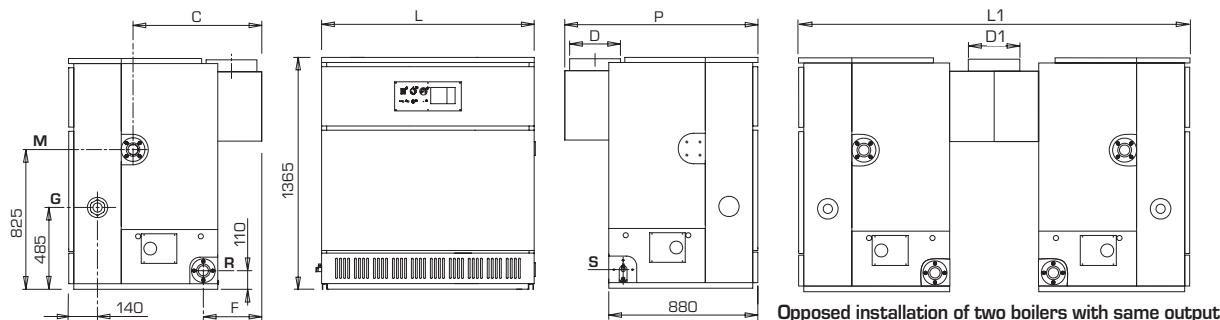

Dimensions

Model	L mm	L1 mm	P mm	C mm	D ømm	D1 ømm	F
129 Mk.II	810	2360	1110	730	250	400	315
151 Mk.II	920	2360	1110	730	250	400	315
172 Mk.II	1030	2360	1110	730	250	400	315
194 Mk.II	1145	2360	1140	760	300	450	345
215 Mk.II	1255	2360	1140	760	300	450	345
237 Mk.II	1370	2380	1190	810	350	500	395
258 Mk.II	1480	2380	1190	810	350	500	395
279 Mk.II	1580	2380	1190	810	350	500	395

Connections

M	C.H. flow	2"
R	C.H. return	2"
G	Gas	1 ½"

Technical and safety characteristics

	RS Mk.II	Optional
Second gas electro valve and pressure switch	▲	
Automatic ignition by means of flame ionization	▲	
Electric valve with double obturator, which in absence of flames, stops the gas flow	▲	
Multifunctional climatic adjuster "RVA 43.222" for the management of single boilers and in sequence up to sixteen boilers		▲
Room temperature controller "QAA 70" for the remote control of an area integrated with the climatic regulator "RVA 46.531"		▲
Boiler D.H.W. tank, zone temperature sensor "QAZ 21" cable L. 2000		▲
Two-step combustion system allowing a higher performance and reducing the thermal inertia	▲	
External temperature sensor "QAC 31" for the activation of the automatic sliding of the heating temperature		▲
Temperature contact sensor "QAD 21" for cascade flow/return and zone		▲
Combination of vertical storage tanks for sanitary hot water made in stainless steel with a capacity of 500/1000/2000 litres		▲
Multifunctional climatic regulator "RVA 46.531" for the management of single boilers or as area adjuster in installations with mixing valves or pumps		▲
Safety thermostat and thermometer for the control of the C.H. temperature	▲	
Combination of smoke room with single scavenging flue for the disposition of two boilers RS Mk.II with the same potential		▲