

## DL-CE


- 10° ÷ + 99°C

MOD	COD		Ppre	Pmax				DN1
DL 750 CE	A282L59	750	2,5	10	+99°C	800	1920	2" M
DL 750 CE	A282R59	750	2,5	16	+99°C	800	1920	2" M
DL 1000 CE	A282L62	980	2,5	10	+99°C	800	2170	2" M
DL 1000 CE	A282R62	980	2,5	16	+99°C	800	2170	2" M
DL 2000 CE	A282L70	2000	2,5	10	+50°C	1100	2690	G 3"
DL 2000 CE	A282R70	2000	2,5	16	+99°C	1100	2690	G 3"
DL 3000 CE	A282L74	3000	2,5	10	+99°C	1250	3100	G 3"
DL 3000 CE	A282R74	3000	2,5	16	+99°C	1250	3100	G 3"
DL 5000 CE	A282L80	5000	2,5	10	+99°C	1550	3315	G 3"



Modelli dai 750 ai 2000 litri versione con tirante superiore.  
Modelli 3000 e 5000 litri versione con flangia superiore.

Models from 750 through 2000 litres with top bulkhead fitting.  
Models 3000 and 5000 litres with upper flange.

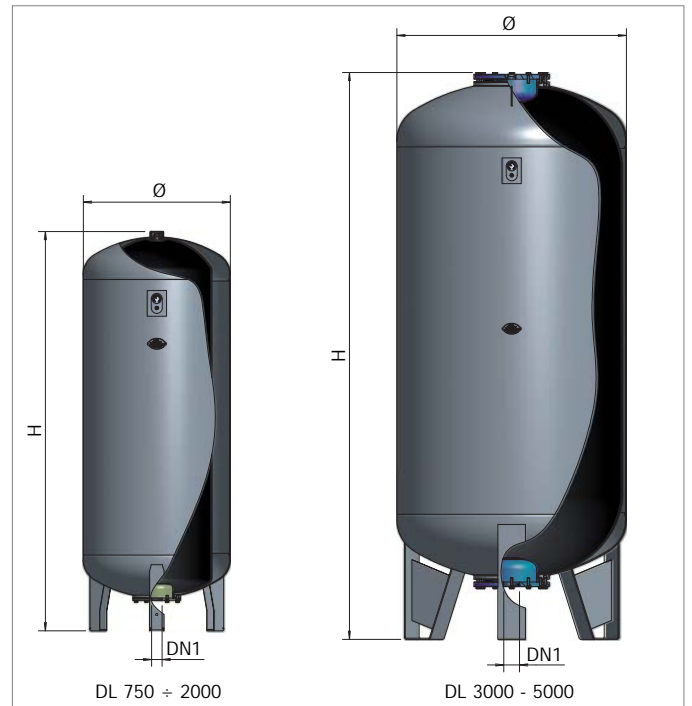

**CALOR SRL**

Str. Progresului nr. 30-40, sector 5, Bucuresti

tel: 021.411.44.44, fax: 021.411.36.14

[www.calorserv.ro](http://www.calorserv.ro) - [www.calor.ro](http://www.calor.ro)