


UB 200 INOX

The UB 200 INOX storage tank unit is realised in stainless steel, ideal for containing domestic hot water, with upper inspection flange, RAL 9010 painted casing and equipped with:

- 2 extractable, stainless steel double concentric coil water/water heat exchangers
- 8 bar safety valve
- 8 litre domestic hot water expansion vessel with pre-load of 3,5 bar
- 2 probe-supports
- NTC probe for Immergas boiler connection
- Storage tank draining valve
- Thermometer and thermometer probe
- Magnesium anode
- Polystyrene shell insulation that can be disassembled
- Attachment to solar collectors using optional kit code 3.015150
- Possibility of coupling with 2 UB 200 in parallel

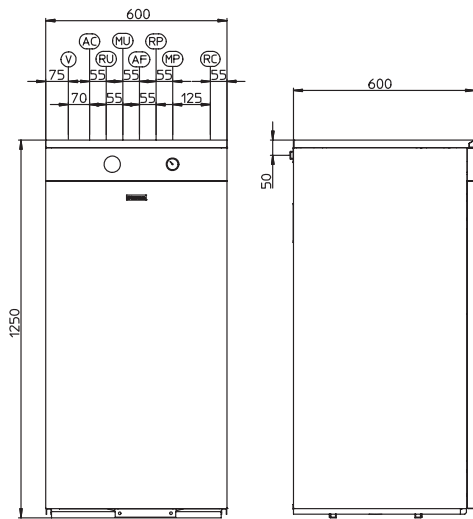

Connections

To boiler	To solar collectors	Domestic hot water		
MU-RU	MP-RP	RC	AC	AF
3/4"	3/4"	1/2"	1/2"	1/2"

KEY

- V - Main supply
- MU - Storage tank delivery
- RU - Storage tank return
- AC - Hot domestic water outlet
- AF - Cold domestic water inlet
- RC - Recirculation
- RP - Solar panels return
- MP - Solar panels delivery

UB 200 INOX

code 3.015356

Technical data	Unit of measurement	UB 200 Inox
Capacity	l	200
Maximum d.h.w. pressure	bar	8
Maximum d.h.w. temperature	°C	90
Expansion vessel capacity	l	8
Maximum c.h. pressure	bar	6
Maximum c.h. temperature	°C	95
Full appliance weight	Kg	273,5
Upper coil heating surface (boiler)	m ²	0,53
Upper coil capacity	l	2,23
Lower coil heating surface (solar panels)	m ²	0,53
Lower coil capacity	l	2,23
Heat losses	kWh/24h	2,5