

## LIGHT OIL BURNER PUMP



### Series AG



### CHARACTERISTICS

Applications:

- Light oil.
- One pipe or two pipes systems.
- Self-priming.
- Hub  $\varnothing$  32 mm or hub  $\varnothing$  54 mm with flange.
- Capacity from 50 l/h to 230 l/h.


### FUNCTION

The suction vacuum generated by the gears sucks up the fuel through the suction connection; it crosses the filter and the fuel is sent under pressure to the pressure adjustment screw.

This hydraulic valve opens when oil pressure gets over spring strength settled by pressure adjustment screw and the oil reaches nozzle line.

In two pipes systems the exceeding oil flows into the tank through the return line; in one pipe system, after the removing the by-pass screw, it goes back to the gears.

When burner stops, the oil pressure immediately comes down and the spring strength, move the piston which stop the fluid flow to the line and at the same time allows the forwarding of the light oil to the return line.

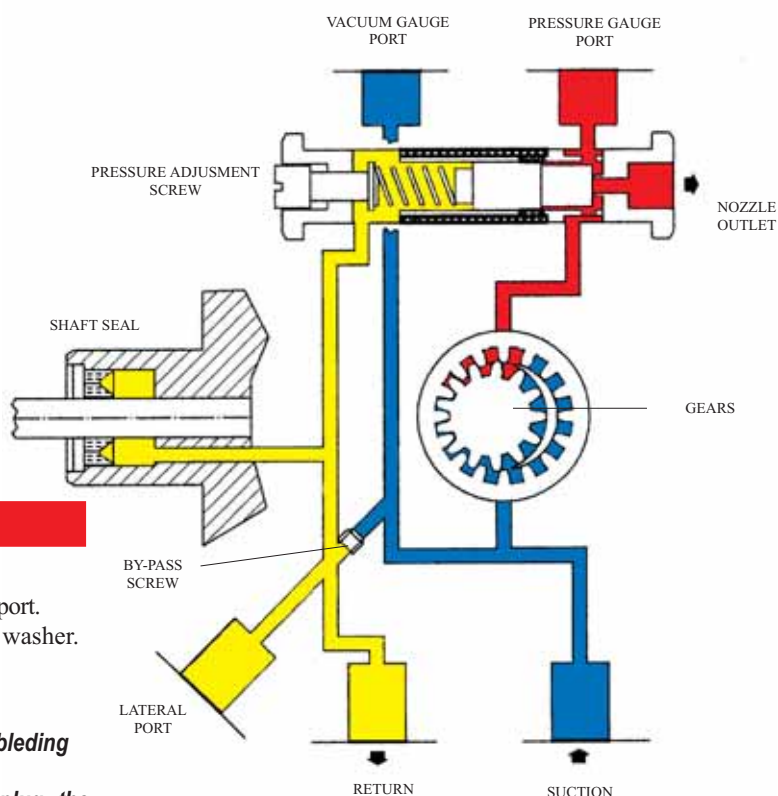

### CONVERSION 2 PIPES - 1 PIPE SYSTEM

For the conversion proceed as follow:

- Remove the by-pass screw, located inside the return port.
- Lock the return port with a steel plug G 1/4 and washer.

#### ATTENTION:

*In two-pipes system oil pump is self-priming, the bleeding is obtained through the return line.*

*In one-pipe system the return line is closed by plug, the bleeding must be obtained through the nozzle or opening the pressure gauge port, to accelerate the way out of the air.*

## TECHNICAL DATA


### HYDRAULIC DATA

Factory settings	12 bar
Pressure range	4 - 25 bar
Viscosity range	2,8 - 75 cSt
Oil temperature	70°C max
Inlet pressure	2 bar max
Recycle pressure	2 bar max
Suction vacuum	0,45 bar max
Speed	2800 - 3480 rpm
Starting torque	0,30 Nm
Capacity	see graphs
Power consumption	see graphs


### GENERAL DATA

Mounting	Hub Ø32mm or Flange Ø54mm according to EN 225	
Connections	Nozzle outlet	G 1/8
	Pressure gauge port	G 1/8
	Vacuum gauge port	G 1/8
	Suction	G 1/4
	Return	G 1/4
Strainer	Open area	142 cm <sup>2</sup>
	Mesh	100 µm
Weight	2,0 kg	


## PRESSURE - CAPACITY DIAGRAM

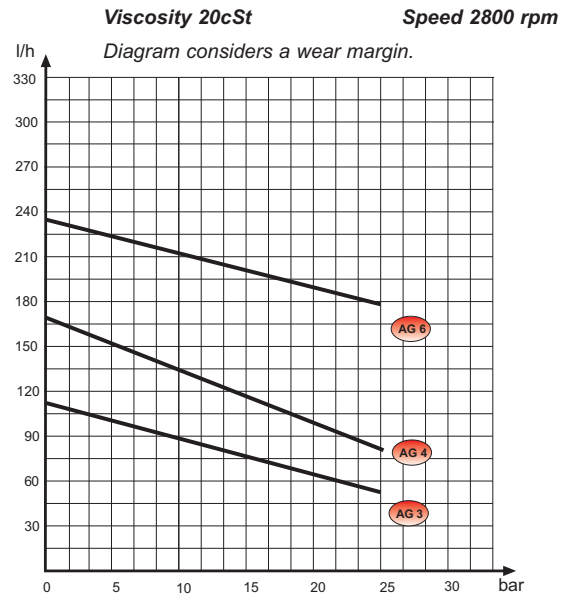


## POWER CONSUMPTION - PRESSURE DIAGRAM

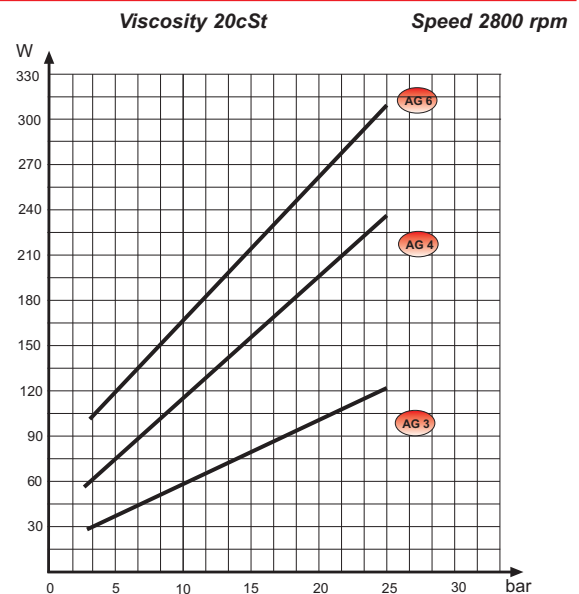

## IDENTIFICATION OF THE PUMP

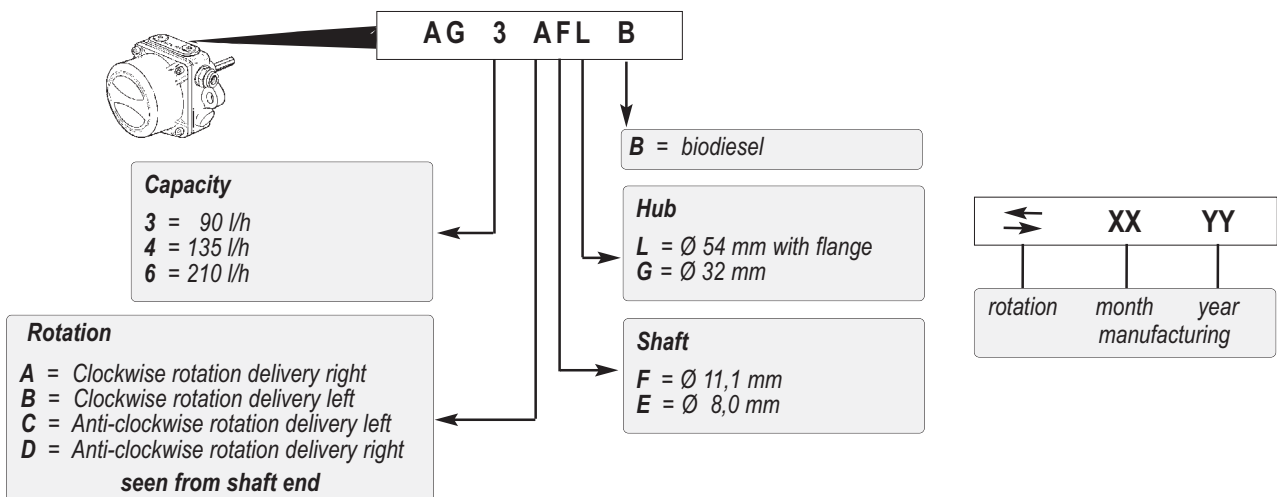


## COMPONENTS OF THE PUMP

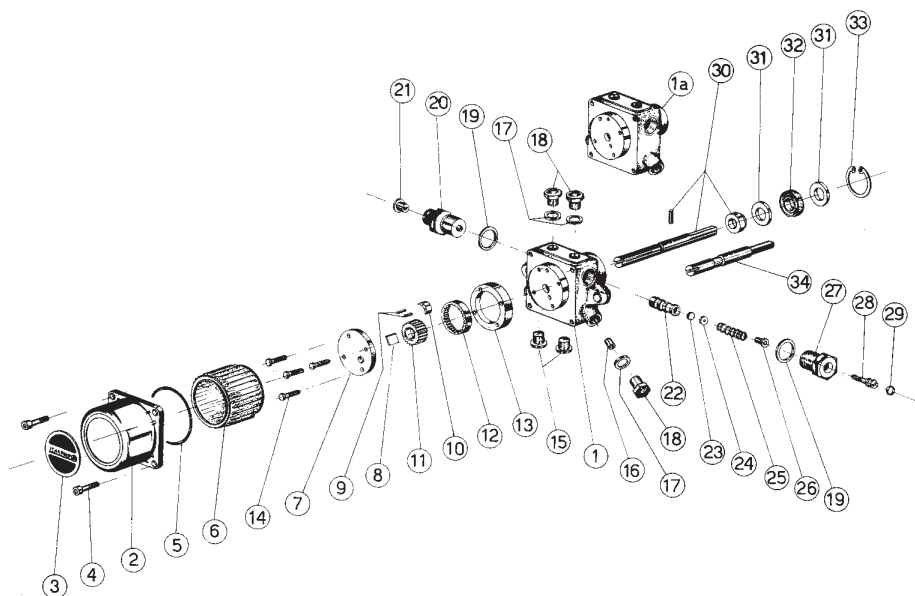


### INSTALLATION OF THE PUMP

- The pump can be installed in all indicated positions.
- Make sure that the characteristics of the pump are compatible with those of the motor or of the boiler.
- Control the rotation of pump-motor.

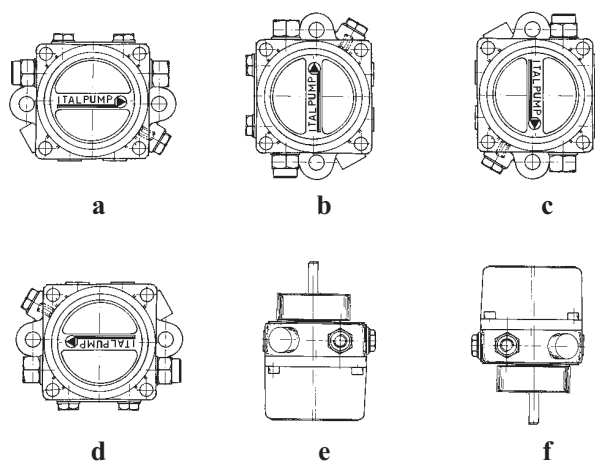

### REGULATION OF THE PUMP PRESSURE


- Apply the manometer on the pressure gauge port.
- Rotate with the slotted screwdriver changing the pressure which has to be:
  - Pressure max: 25 bar
  - Pressure min: 4 bar



### CLEANING OF THE FILTER

- Remove the cover as indicated in the figure.
- Extract the filter and clean it with the clean oil fuel.


**ATTENTION:** This operations have to be made periodically by the technical personnel.

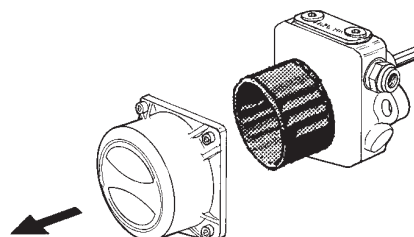


The repairs which require the substitution of pieces, must be realized by the manufacturer.

## VERSIONS OF THE PUMP

### Flange mounting connection $\varnothing 54$ mm

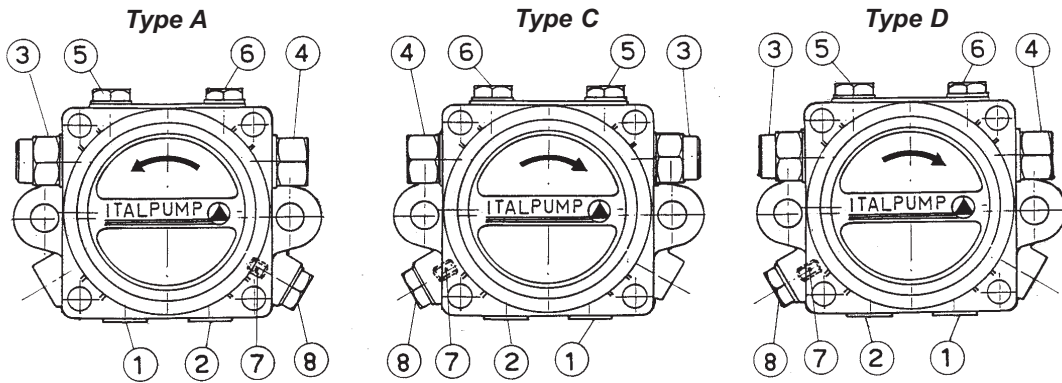

### Hub mounting connection $\varnothing 32$ mm

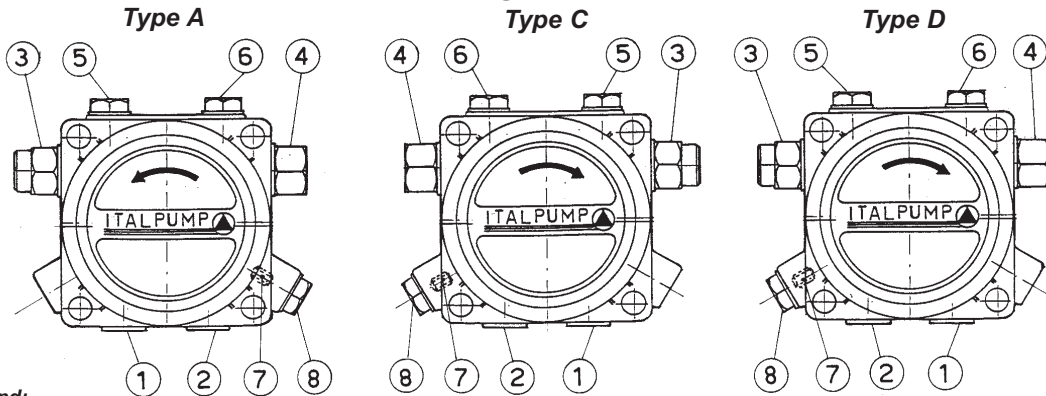

**Legend:**



1 - Suction  
2 - Return

3 - Nozzle outlet  
4 - Pressure gauge port


5 - Pressure adjustment screw  
6 - Vacuum gauge port

7 - By-pass screw  
8 - Lateral port

## DIMENSIONS OF THE PUMP

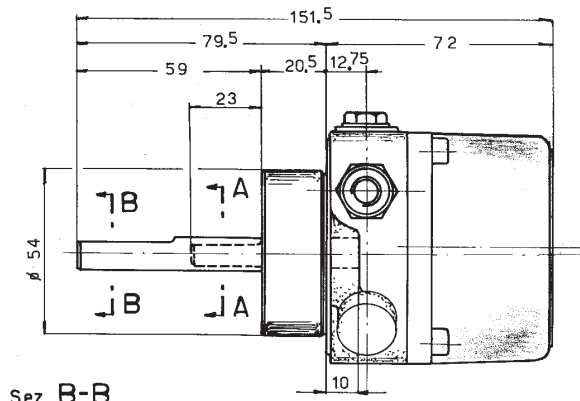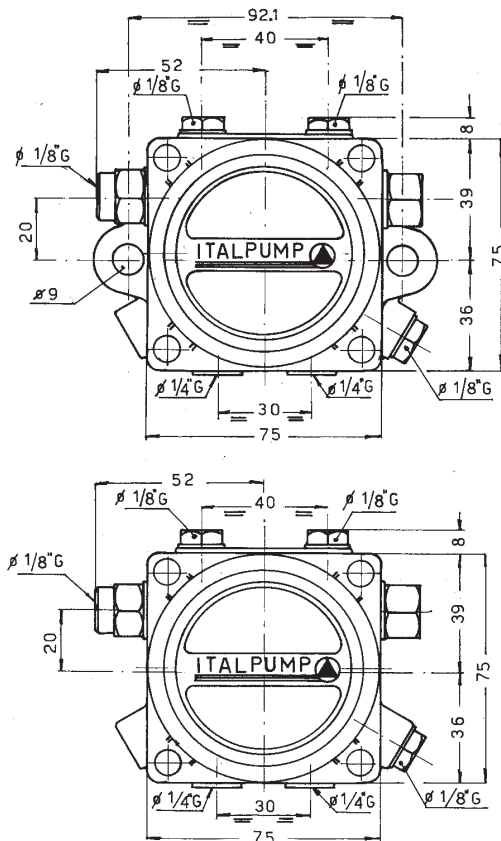

Pump type A,  
hub  $\varnothing 54$  mm with flange

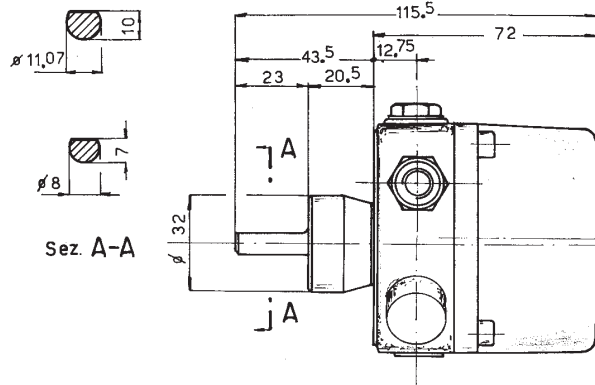

Pump type A,  
hub  $\varnothing 32$  mm