



VISTA DA
VIEW FROM X-X

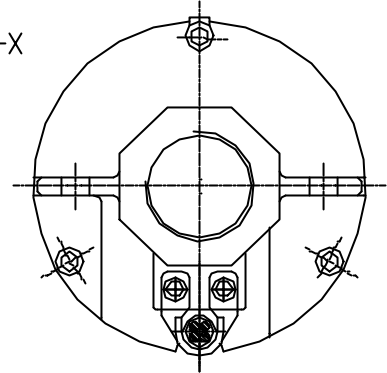

CAVIO CONNETTORE ESTRAIBILE E TERRA INTEGRALE-Lunghezza standard 10m
REMOVABLE CABLE CONNECTOR AND INTEGRAL EARTH-Standard length 10m

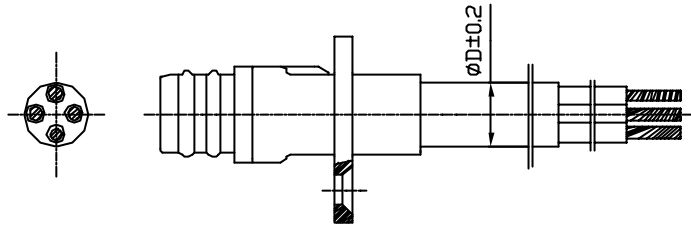

Tipo di cavo Cable type	Sezione Sect.	$\varnothing D(\text{mm})$
Neoprene-H07RN-F	4x1.5mm ²	10.7
PVC-H05VV-F	4x1.5mm ²	9

Dati tecnici per le pompe periferiche Sumoto ONK 4"
Technical data for Sumoto peripheral pump ONK 4" series.

Tipo Type		kW	Hp	H (mm)	Peso Weight Kg
MonoPhase-1 ϕ V220/50-60Hz	ONK 075	0.55	0.75	439	12.5
	ONK 100	0.75	1	464	13.5
	ONK 150	1.1	1.5	525	15
TriPhase-3 ϕ V380/50-60Hz	ONK 075	0.55	0.75	424	12
	ONK 100	0.75	1	439	12.5
	ONK 150	1.1	1.5	490	14