


BOX BD 25/25 M4 1/2

Series general data BOX BD



MANUFACTURING FEATURES:

- Impellers made of polyamide reinforced with fiberglass up to size 33/33 (12/12). The rest models is galvanized steel sheet.
- BD range fans fitted in soundproof cabinets through insulated panels with Flexi roll Pol Na 30 Anthracite grey M1 fire resistance.
- Fan fitted over antivibration mountings.
- Interchangeable panels giving the possibility to different fan positions.
- Connection gland included.
- Equipped with inlet deflector wing, minimizing the turbulence and optimizing the efficiency.
- Closed motors SPECIALLY DESIGNED. Extruded aluminium motor housing. Totally enclosed wiring box IP-65. IP-54 motor protection and rated class F insulation. Standard voltages 230V 50 Hz for single phase and 230/400V 50Hz.

APPLICATIONS:


Designed for inline installation, indoor or outdoor assembly, they are suitable for:

- Air renewal in buildings and industries.
- Industrial and professional kitchen hoods.
- Maximum working temperature: 50°C.


UNDER REQUEST:

- 3 speed fans.
- 60Hz fans.
- Vertical discharge, circular inlet and outlet, blind cover.
- LGO position.

Series accessories BOX BD



Characteristic curve

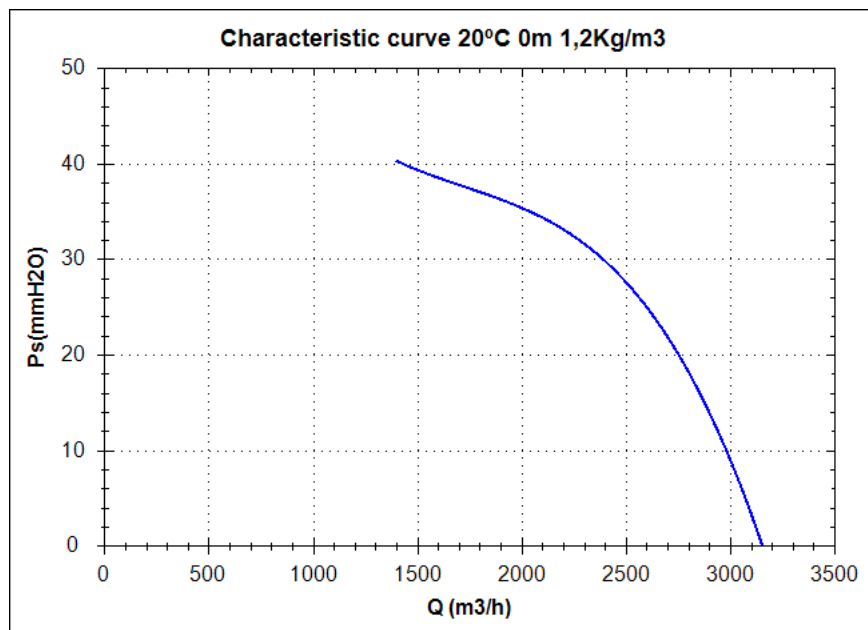

Design point

Q (m ³ /h)	
Ps(mmH ₂ O)	

Service point

Impeller rpm	
Max. temp.(°C)	
Q (m ³ /h)	
Ps(mmH ₂ O)	
Pd(mmH ₂ O)	
Pt(mmH ₂ O)	
Air speed(m/s)	


Technical data

Impeller rpm	1350
Motor rpm	1350
Approx. weight(kg)	30
Maximum flow rate(m ³ /h)	3200

Power(kW)	0,37
Imax 230V(A)	2,83
Imax 400V(A)	-
Imax 690V(A)	-

BOX BD 25/25 M4 1/2

dimensions diagram

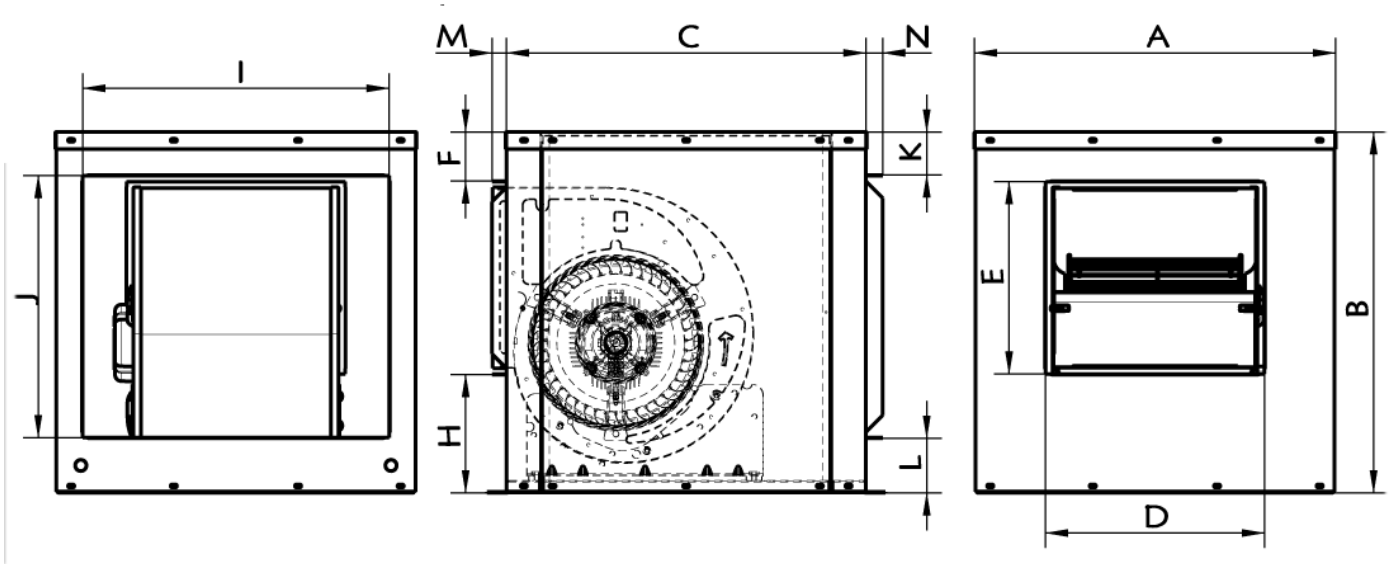

Dimensions (mm)

A=535	B=535	C=535	D=321	E=278	F=91	H=164	I=418	J=359	K=77	L=96,25	M=23	N=27
-------	-------	-------	-------	-------	------	-------	-------	-------	------	---------	------	------

Wiring diagram

