


Client _____ Proiect _____
 Nr. client _____ Nr. proiect _____
 Persoana de contact _____ Poz. nr. _____
 In grija _____ Locatia _____
 Data _____

16.05.2011

Pag. 1 / 1

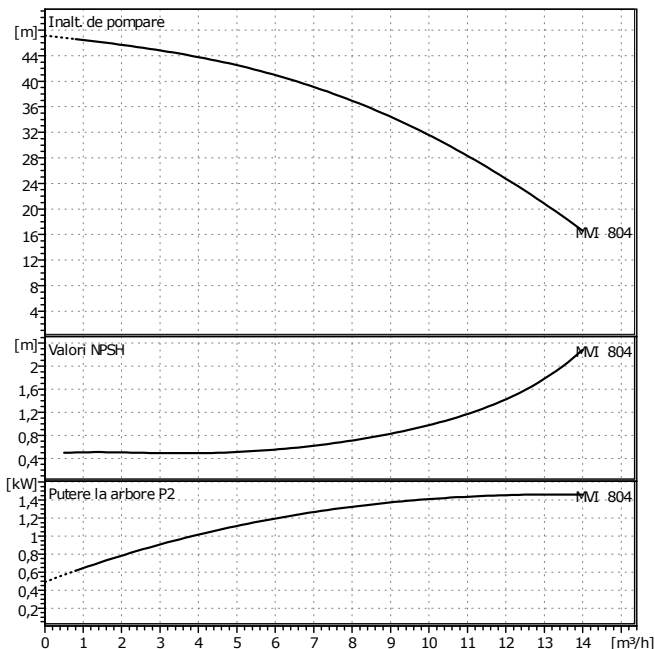

Date cerute

Debit	0	m³/h
Inaltime de pompare	0	m
Fluid		
Temperatura fluid	0	°C
Densitate	0,9983	kg/dm³
Viscozitate cinematica	1,005	mm²/s
Presiune vaporizare	0	bar

Date generale pompa

Fabricat	WILO
Tip	MVI 804/PN16 1~
Tip pompa	Pompa cu un motor
Presiune nominala	PN 16
Temp. min. fluid	-15 °C
Temp. max. fluid	120 °C

Date efectiv realizate

Debit		m³/h
Inaltime de pompare		m
Turatie	2900	1/min
Putere la arbore P2		kW
NPSH		m

Materiale/Etansare ax

Rotoare	Inox 1.4301
Camere etaje	Inox 1.4301
Carcasa presiune	Inox 1.4301
Arbore	Inox 1.4301
Capacul carcasei	Inox 1.4301
Etansare	EPDM
Etansare mecanica	Wolfram carbid/grafit

Dimensiuni

	mm					
E	250					
H	654					
h2	404					
X	148					
M	190					

Aspiratie	Rp 1 1/2 / PN 16
Refulare	Rp 1 1/2 / PN 16
Greutate	31 kg

Date motor

Putere nominala P2	1,5	kW
Turatie nominala	2950	1/min
Tensiune nominala	1~230 V, 50 Hz	
Intensitate el. max.curent	6,5	A
Grad de protectie	IP 55	
Toleranta permisa tensiune	+/-10%	

Nr. art. in versiunea standard 4018792

