


NOCCHI EASYBOOST 20 MULTINOX VE + PRESSURE BOOSTER SET WITH PRESSURE SWITCH CONTROL

HYDRAULIC PERFORMANCE

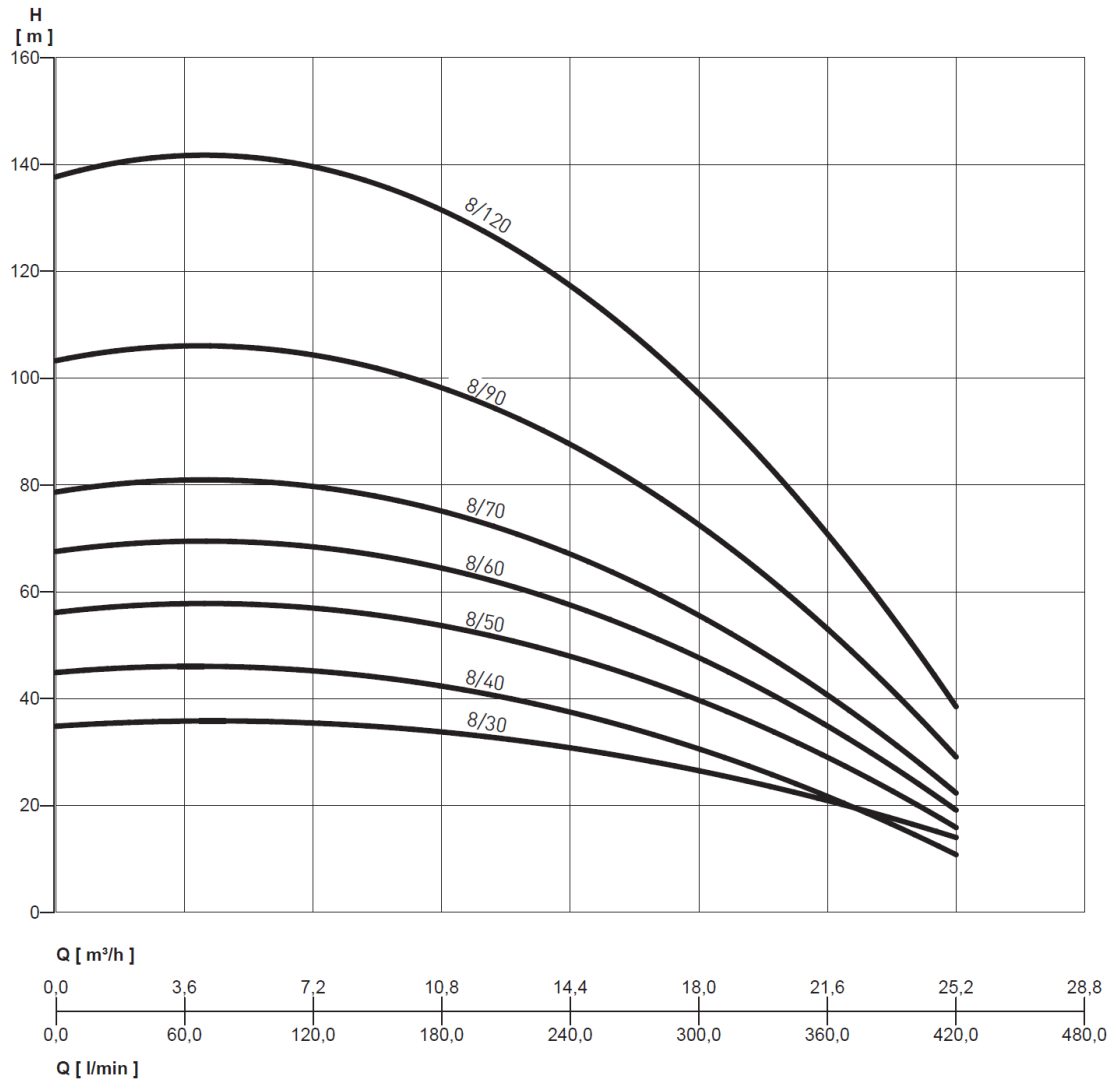

PERFORMANCE TABLE


MODEL	P2	VOLT. (V)	l/min m³/h	0	60	120	180	240	300	360	420
	kW			0	3.6	7.2	10.8	14.4	18	21.6	25.2
EASY20 MULTINOX VE+ 8-30	2x1	1 - 230 3 - 400	m.ca./m.c.w.	36	35	35	33	30	25	28	10
EASY20 MULTINOX VE+ 8-40	2x1.2	1 - 230 3 - 400		46	45	44	42	39	32	20	11
EASY20 MULTINOX VE+ 8-50	2x1.5	1 - 230 3 - 400		57	57	56	53	50	40	28	16
EASY20 MULTINOX VE+ 8-60	2x1.7	3 - 400		69	68	67	64	60	48	34	19
EASY20 MULTINOX VE+ 8-70	2x1.9	3 - 400		80	80	78	74	70	56	40	22
EASY20 MULTINOX VE+ 8-90	2x3	3 - 400		105	104	103	98	90	73	52	29
EASY20 MULTINOX VE+ 8-120	2x4	3 - 400		140	139	138	131	120	98	70	38

For VOLT. values, see the data of the reference pump


NOCCHI EASYBOOST 20 MULTINOX VE + PRESSURE BOOSTER SET WITH PRESSURE SWITCH CONTROL

OVERALL DIMENSIONS AND WEIGHTS

SINGLE PHASE

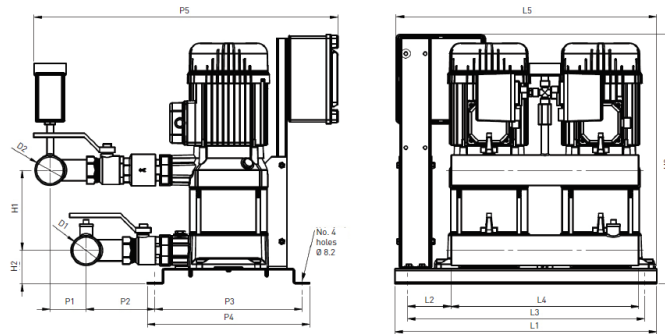

THREE-PHASE

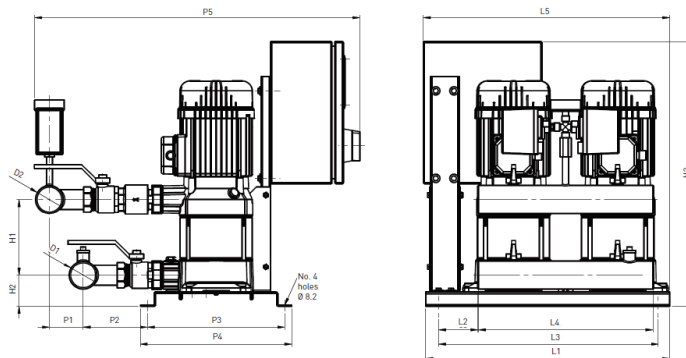

OVERALL DIMENSIONS AND WEIGHTS

MODEL	Dimensions mm.															Weight (Kg)
	L1	L2	L3	L4	L5	P1	P2	P3	P4	P5	H1	H2	H3	D1	D2	
EASY20 MULTINOX VE+ 8-30 M	515	95	485	370	520	71	138	290	320	675	130	64	510	2"	2"	69
EASY20 MULTINOX VE+ 8-30 T	515	95	485	370	520	71	138	290	320	690	130	64	560	2"	2"	75
EASY20 MULTINOX VE+ 8-40 M	515	95	485	370	520	71	138	290	320	675	157	64	510	2"	2"	73
EASY20 MULTINOX VE+ 8-40 T	515	95	485	370	520	71	138	290	320	690	157	64	560	2"	2"	79
EASY20 MULTINOX VE+ 8-50 M	515	95	485	370	520	71	138	290	320	675	184	64	510	2"	2"	77
EASY20 MULTINOX VE+ 8-50 T	515	95	485	370	520	71	138	290	320	690	184	64	560	2"	2"	83
EASY20 MULTINOX VE+ 8-60 T	515	95	485	370	520	71	138	290	320	690	211	64	560	2"	2"	87
EASY20 MULTINOX VE+ 8-70 T	515	95	485	370	520	71	138	290	320	690	238	64	560	2"	2"	91
EASY20 MULTINOX VE+ 8-90 T	515	95	485	370	520	71	138	290	320	690	292	64	750	2"	2"	109
EASY20 MULTINOX VE+ 8-120 T	515	95	485	370	520	71	138	290	320	690	292	64	750	2"	2"	115