


NOCCHI EASYBOOST 20 PVM

PRESSURE BOOSTER SET WITH PRESSURE SWITCH CONTROL

HYDRAULIC PERFORMANCE

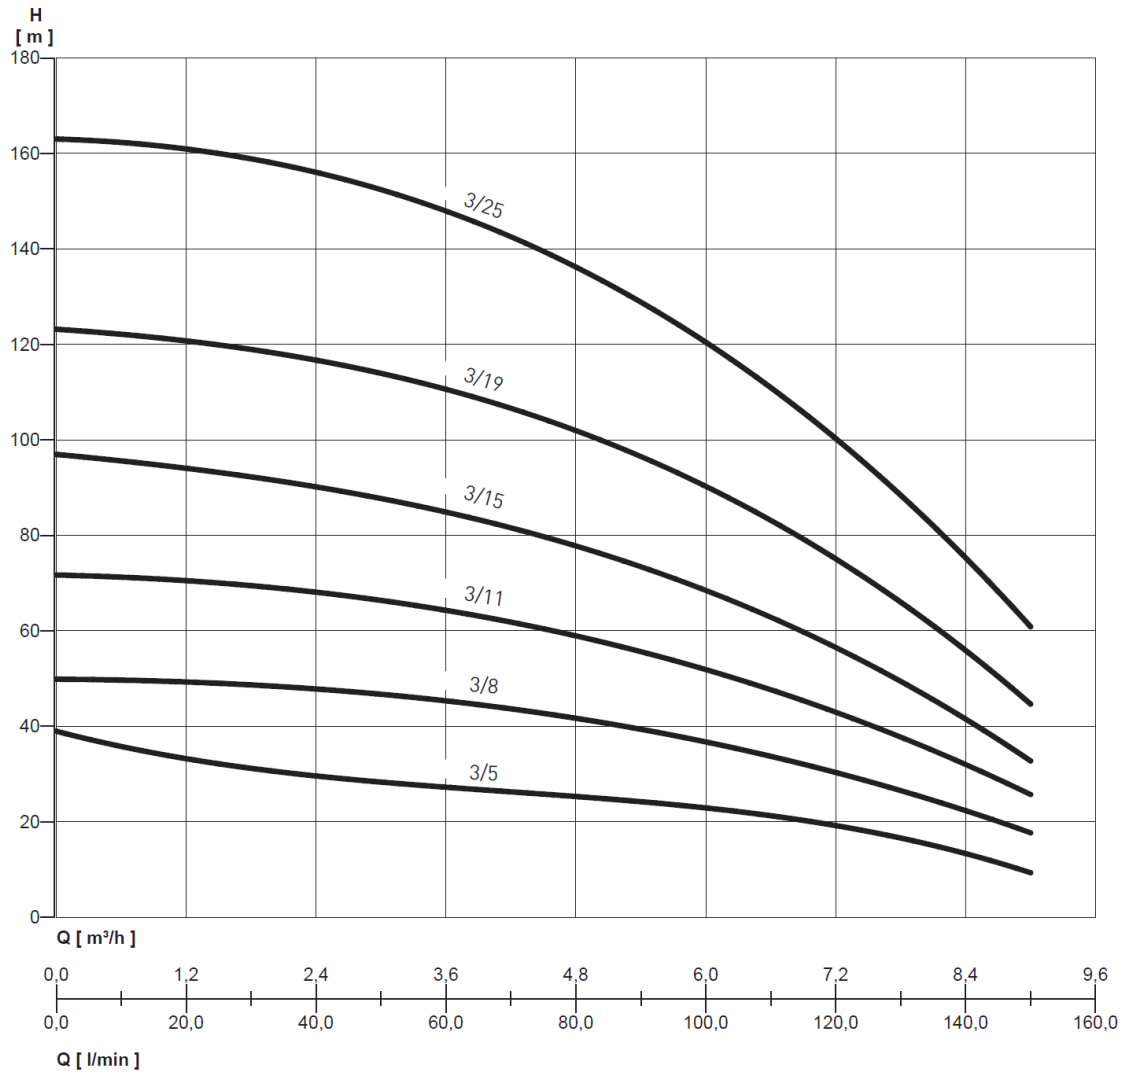

NOCCHI EASYBOOST 20 PVM



PRESSURE BOOSTER SET WITH PRESSURE SWITCH CONTROL

PERFORMANCE TABLE



MODEL	P2	VOLT. (V)	l/min m ³ /h	0	20	40	60	80	100	120	140	150
	kW			0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.0
EASY20 PVM 3-5	2x0.37	1 - 230 3 - 400	m.c.a./m.c.w.	40	31	30	28	26	23	18	13	10
EASY20 PVM 3-8	2x0.75	1 - 230 3 - 400		50	49	48	45	42	37	30	22	18
EASY20 PVM 3-11	2x1.1	1 - 230 3 - 400		72	70	68	64	60	52	42	32	26
EASY20 PVM 3-15	2x1.1	1 - 230 3 - 400		97	94	90	85	78	68	57	41	33
EASY20 PVM 3-19	2x1.5	1 - 230 3 - 400		123	121	117	110	102	90	76	55	45
EASY20 PVM 3-25	2x2.2	3 - 400		165	157	156	150	138	120	98	75	62

For VOLT. values, see the data of the reference pump

SINGLE PHASE



THREE-PHASE



OVERALL DIMENSIONS AND WEIGHTS

MODEL	Dimensions mm.													Weight (Kg)
	L1	L2	L3	L4	P1	P2	P3	P4	P5	H2	H3	D1	D2	
EASY20 PVM 3-5 M	515	95	485	370	508	80	290	320	562	80	510	1"1/2	1"1/2	64
EASY20 PVM 3-5 T	515	95	485	370	508	80	290	320	620	80	560	1"1/2	1"1/2	74
EASY20 PVM 3-8 M	515	95	485	370	508	80	290	320	562	80	510	1"1/2	1"1/2	74
EASY20 PVM 3-8 T	515	95	485	370	508	80	290	320	620	80	560	1"1/2	1"1/2	80
EASY20 PVM 3-11 M	515	95	485	370	508	80	290	320	562	80	580	1"1/2	1"1/2	90
EASY20 PVM 3-11 T	515	95	485	370	508	80	290	320	620	80	690	1"1/2	1"1/2	96
EASY20 PVM 3-15 M	515	95	485	370	508	80	290	320	562	80	655	1"1/2	1"1/2	94
EASY20 PVM 3-15 T	515	95	485	370	508	80	290	320	620	80	655	1"1/2	1"1/2	100
EASY20 PVM 3-19 M	515	95	485	370	508	80	290	320	562	80	775	1"1/2	1"1/2	108
EASY20 PVM 3-19 T	515	95	485	370	508	80	290	320	620	80	775	1"1/2	1"1/2	114
EASY20 PVM 3-25 T	515	95	485	370	508	80	290	320	620	80	825	1"1/2	1"1/2	130