


TABLE OF HYDRAULIC PERFORMANCE

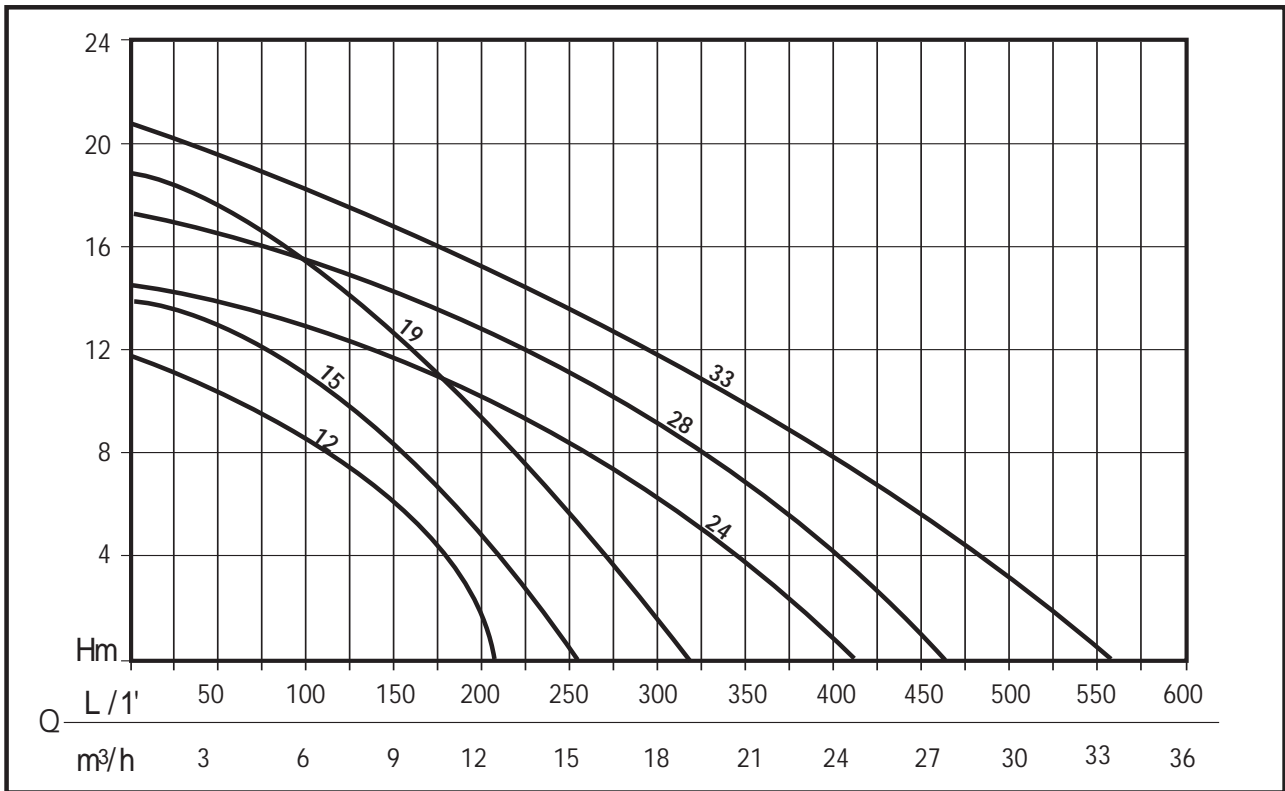

PUMP PERFORMANCE

CODE	MODEL	Nominal Power		Absorbed Power		VOLTAGE (V)	Amp.	F.	Q	Discharge head in meters							
		HP	kW	HP	kW					100	150	200	300	350	400	450	500
N7241230	SWIMMEY 12 M	0,5	0,37	0,75	0,55	1 - 230 V	2,5	10	Q	100	150	200	300	350	400	450	500
N7241290	SWIMMEY 12 T					3 - 400 V	1,7-1			6	9	12					
N7241240	SWIMMEY 15 M	0,75	0,5	0,9	0,7	1 - 230 V	3	10	Q	100	150	200	300	350	400	450	500
N7241300	SWIMMEY 15 T					3 - 400 V	2,2-1,3			6	9	12					
N7241250	SWIMMEY 19 M	1	0,75	1,5	1,1	1 - 230 V	5	20	Q	100	150	200	300	350	400	450	500
N7241310	SWIMMEY 19 T					3 - 400 V	3,3-1,9			6	9	12	1,5				
N7241260	SWIMMEY 24 M	1	0,75	1,5	1,1	1 - 230 V	4,8	20	Q	100	150	200	300	350	400	450	500
N7241320	SWIMMEY 24 T					3 - 400 V	3-1,7			6	9	12	0,5				
N7241270	SWIMMEY 28 M	1,5	1,13	2	1,5	1 - 230 V	7	30	Q	100	150	200	300	350	400	450	500
N7241330	SWIMMEY 28 T					3 - 400 V	4,1-2,4			6	9	12	1,5				
N7241280	SWIMMEY 33 M	2	1,5	2,55	1,9	1 - 230 V	8,5	35	Q	100	150	200	300	350	400	450	500
N7241340	SWIMMEY 33 T					3 - 400 V	6-3,6			6	9	12	3,5				

TABLE OF SIZES AND WEIGHTS

Model	Dimension mm.							Weight kg
	A	B	C	D	E	F	DN	
SWIMMEY 12	230	35	565	183	280	240	50	8
SWIMMEY 15	230	35	565	183	280	240	50	8,5
SWIMMEY 19	240	58	590	183	280	255	50	10,2
SWIMMEY 24	240	87	610	183	280	285	50	11
SWIMMEY 28	260	112	635	183	280	310	50	13
SWIMMEY 33	260	112	635	183	280	310	50	14,5

